






IDENTIFICATION CHART



VA crossbar



EURO crossbar



HD crossbar

FRONT CROSSBAR

REAR CROSSBAR

Vehicle	Date	Crossbar	FRONT CROSSBAR					REAR CROSSBAR						
			Front Right Pad/ Clamp	Front Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/ Clamp	Rear Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
Audi A8L 4dr sedan 4H	2010-	1260mm	M415 SUB0148	M414 SUB0148	184mm	71mm	1016mm / 40"	OUT	M414 SUB0197	M415 SUB0197	179mm	66mm	1006mm / 39,39/64"	OUT
			Arrow OUT						Arrow OUT					



DK314 Rhino-Rack VA, Euro & HD crossbar instruction

CONTROLLED




Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated up to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

Pad M414 Front Left. Arrow out.
Pad M415 Front Right. Arrow out.
Pad M415 Rear Left. Arrow out.
Pad M414 Rear Right. Arrow out.

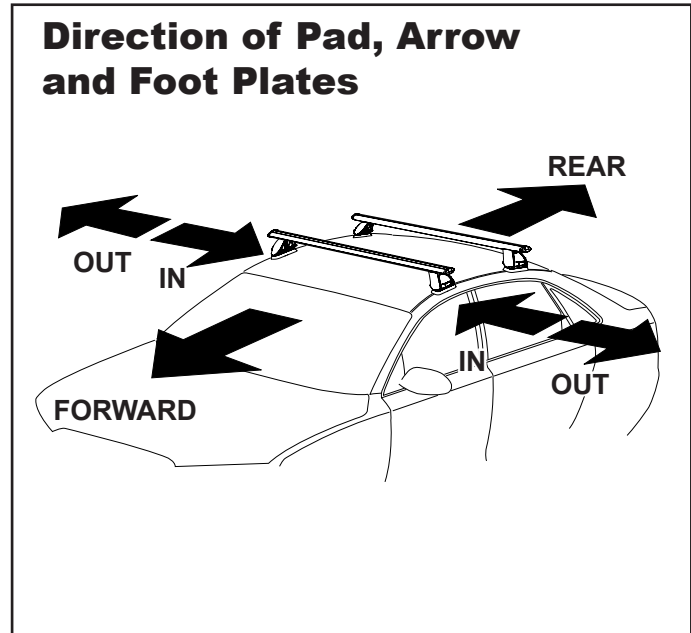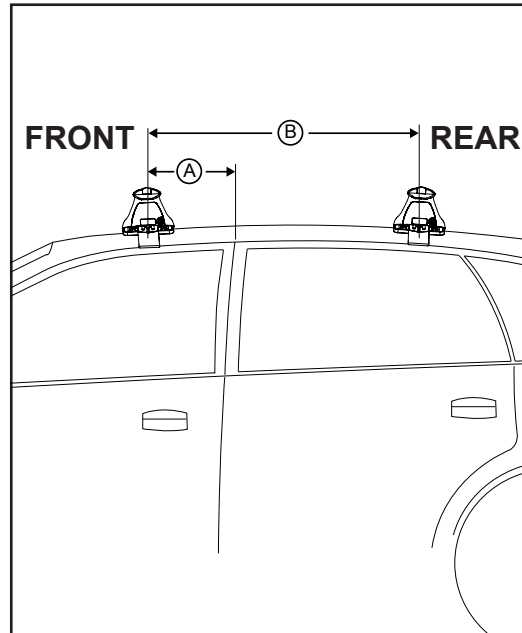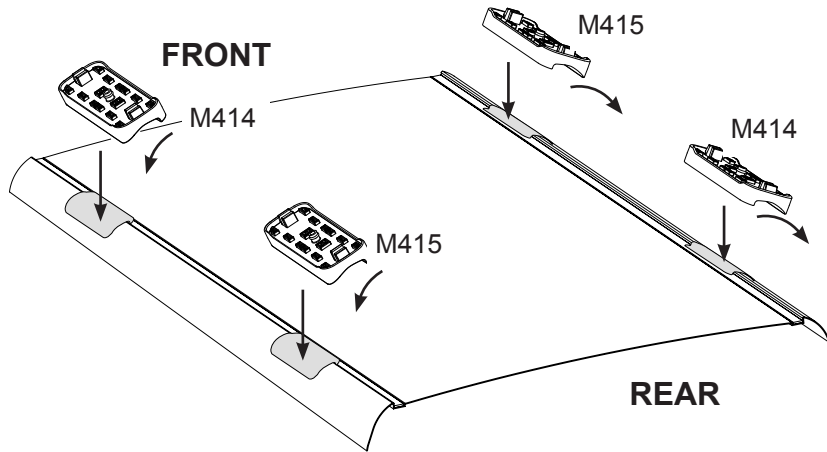

VEHICLE	Date	Measurement A	Measurement B	Load Rating Up to (includes racks 5kg/ 11lbs)
Audi A8L 4dr sedan 4H	2010-	220mm / 8,21/32"	750mm / 29,17/32"	75kg / 165lbs