

CROSSBAR IDENTIFICATIO				IFICATION	VA crossbar			<b>EURO crossbar</b>				<b>HD crossbar</b>		
					FRONT O		۲ HD	Contraction of the second			REAR		R   HD	Contraction of the second
Vehicle	Date	Crossbar		Front Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction	Rear Right	Rear Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction
Range Rover Evoque 4dr SUV	11-	1375mm	Pad	M505 SUB0457 Arrow UT	151mm	96mm	1065mm / 41,15/16"	OUT	Pad	M505 SUB0649 Arrow UT	148mm	93mm	1059mm / 41,45/64"	OUT

Vehicle Note:

Roof Rack suitable for use with non opening Glass Panoramic Roof.



## Rhino Rack 2500 Series - DK437 instruction


**Measurement A**: CENTRE of door jamb to CENTRE arrow of leg foot plate.

**Measurement B**: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.



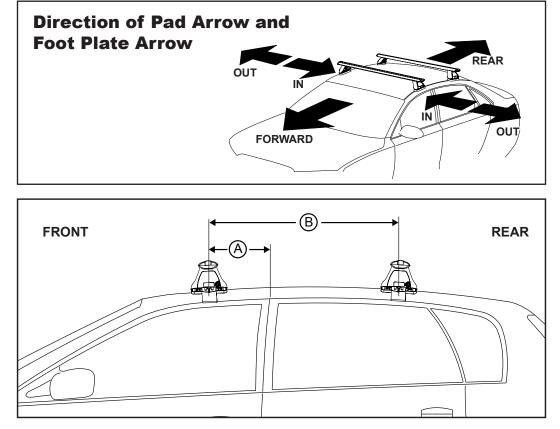

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)		
Range Rover Evoque 4dr SUV	11-	140mm / 5,33/64"	720mm / 28,11/32"	75kg / 165lbs		