




Rhino Rack 2500 Series - DK483 instruction

CROSSBAR IDENTIFICATION







VA crossbar

EURO crossbar

HD crossbar

			FRONT CROSSBAR						REAR CROSSBAR					
					VA	EURO	HD				VA	EURO	HD	
Vehicle	Date	Crossbar	Front Right Pad/Clamp	Front Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/Clamp	Rear Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
MG 6 Plus Fastback	05/17 -	1180mm	M366 SUB0146	M366 SUB0146		450,000	978mm 38 1/2"	OUT	M366 SUB0247	M366 SUB0247		146mm	970mm 38 3/16"	OUT
				Arrow VD	205mm	150mm			Pad <i>F</i>	Arrow VD	201mm			





Rhino Rack 2500 Series - DK483 instruction


Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.


Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated up to 75kg / 165lbs. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

Direction of Pad Arrow and Foot Plate Arrow

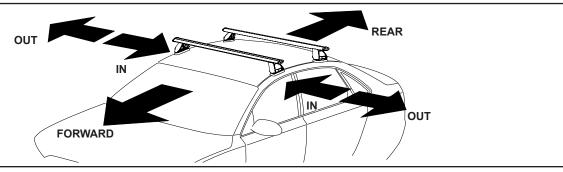

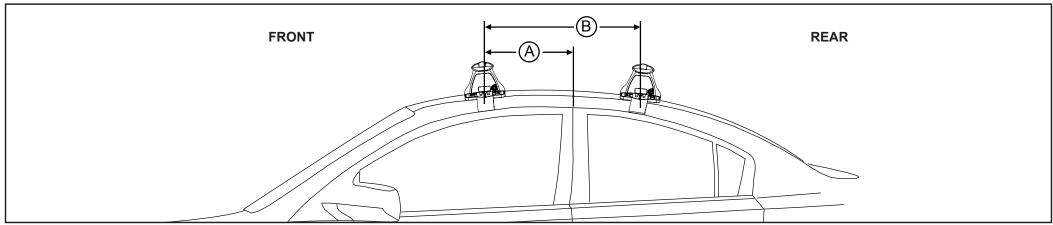

VEHICLE	Date	Measurement A	Measurement B	Load Rating up to (includes racks 5kg/ 11lbs)		
2017 MG 6 Plus Fastback	05/17-	240mm / 9,29/64"	700mm / 27,9/16"	50kg / 110lbs		

Document No. R1668 Issue 1: 11th April 2017 Page 2 of 2