




RHINO-RACK

Aerodynamic & Heavy Duty Roof Rack Systems

SPECIFICATION SHEET

RSS73

VEHICLE BRAND	MITSUBISHI
VEHICLE TYPE	CHALLENGER 4DR
YEAR MODEL	9/98 ON
LOAD RATING	50KG – 2 BAR 75KG – 3 BAR

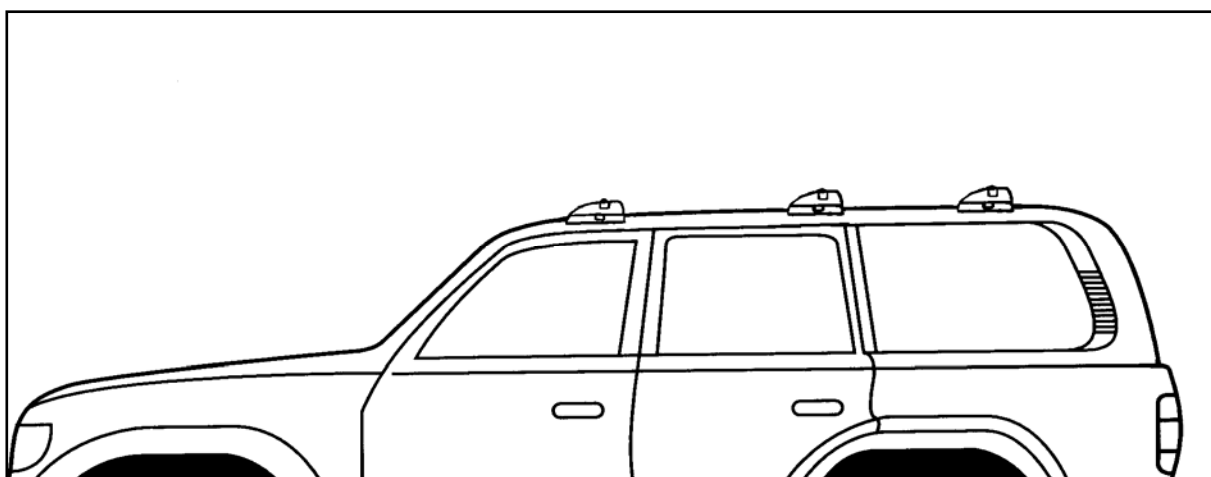

SPECIAL FITTING TIPS

The Mitsubishi Challenger has three fixing positions located along the inside edge of the weather stripping. When fitting the two bar kit it is essential that the rear bar is fitted in the correct position and the front bar can be fitted in either the middle or front position. An additional bar is available for either the front or middle locations.

When fitting bars on vehicle, peel rubber trim back, feed clamp onto hook, place pads under clamps, so that cage nut fits into the slot provided in the rubber pads. Place crossbars on pads and tighten 6mm bolt assembly. See photo below.

SPECIFICATIONS:

Front Bar – 815mm

Middle Bar – 815mm

Rear Bar – 795mm

Manufactured By Rhino-Rack

3 Pike St Rydalmere,

NSW 2116, Australia

(Ph) 02 9638 4744

(Fax) 02 9638 4822

