




Kit 1102

HONDA CR-V, 5-dr SUV, 97-01



480R
754



480



750



THULE[®]
SWEDEN

ISO 11154-E

xx kg
xx lbs

7 kg

15,4 lbs

=

Max.
75kg

Max.
165 lbs

80 km/h
50 Mph
130 km/h
80 Mph
40 km/h
25 Mph
0
km/h
Mph

+

instructions

Kit XXXX

x1

x4

x4

480R/754

x1

x4

x4

480

x1

x4

x4

750

x2

x2

x2

x4

x2

x2

x2

x4

x2

x2

x2

x4

x2

x2

x2

x4

x2

x2

x2






x4

231 x 4


07 x 4

x 1


Kit

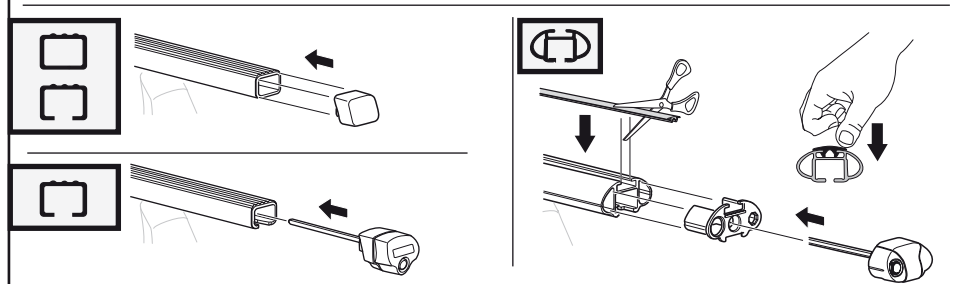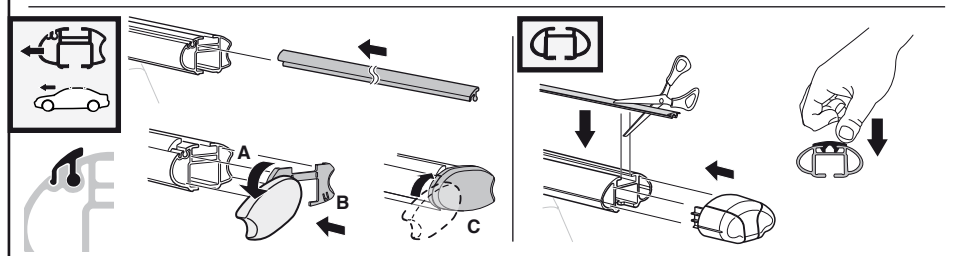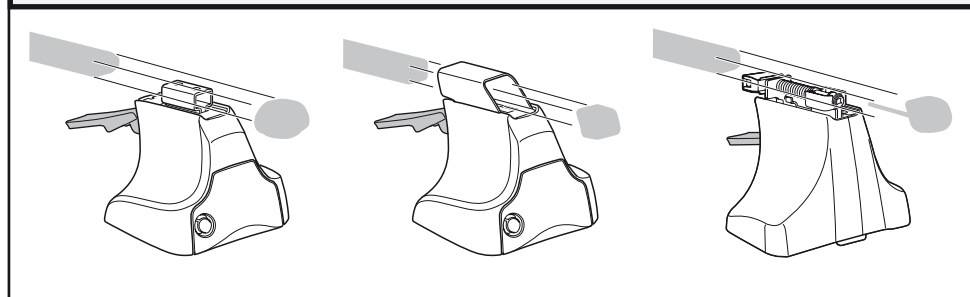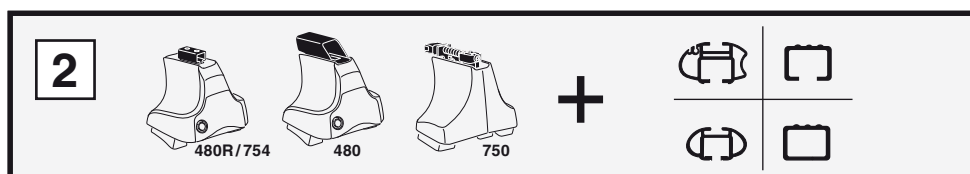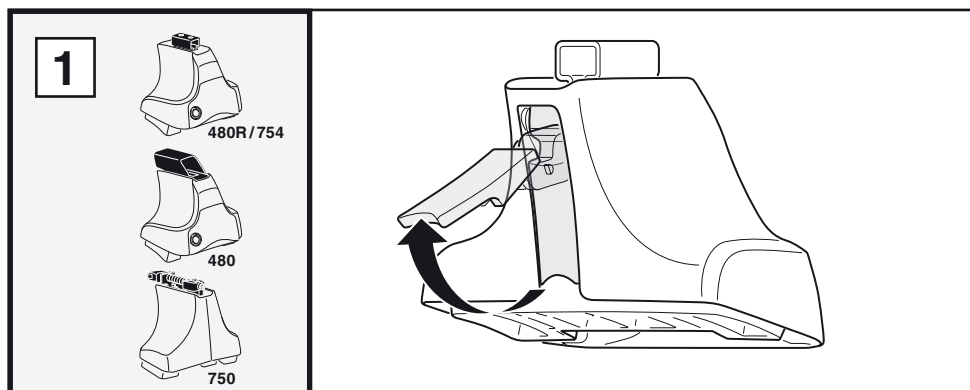


3



754




750

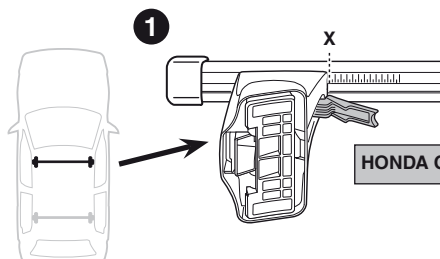

HONDA CR-V, 5-dr SUV, 97-01

X


34,5

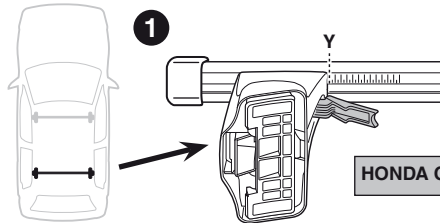

HONDA CR-V, 5-dr SUV, 97-01

Y


32,5



480R



480

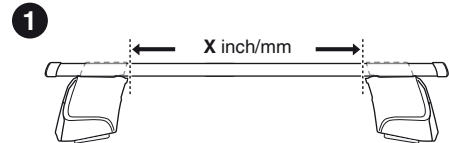



HONDA CR-V, 5-dr SUV, 97-01

X inch

X mm

39 1/4"

996 mm

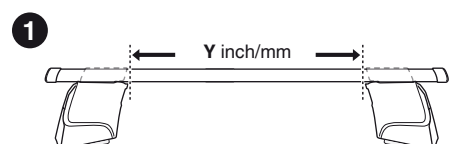


HONDA CR-V, 5-dr SUV, 97-01

Y inch

Y mm













38 3/8"

976 mm




4




HONDA CR-V, 5-dr SUV, 97-01

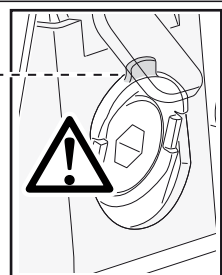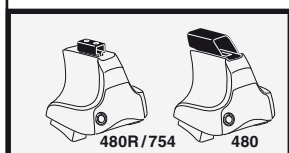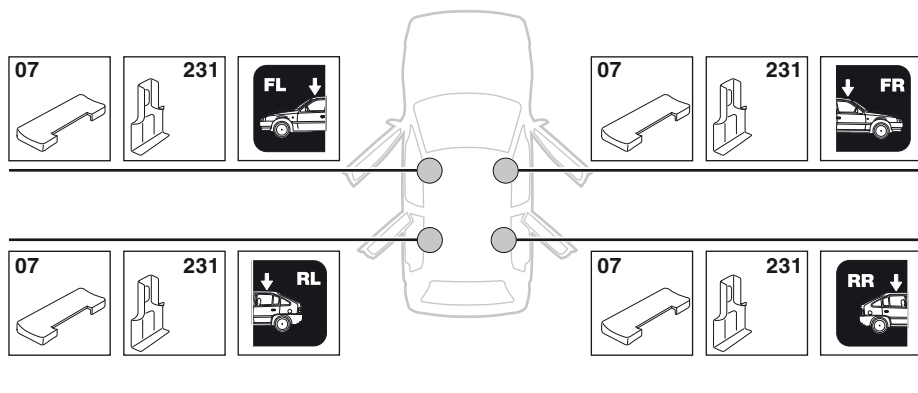

5

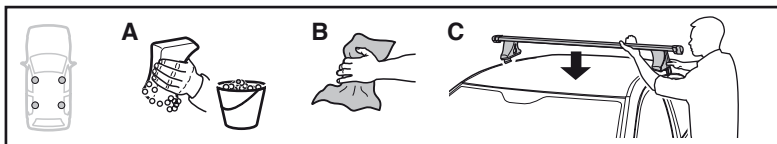

	X mm	Y mm	X inch	Y inch
HONDA CR-V, 5-dr SUV, 97-01	350 mm	700 mm	13 ³ / ₄ "	27 ¹ / ₂ "

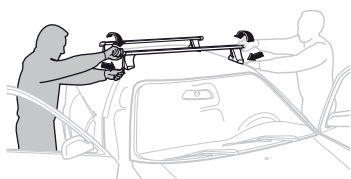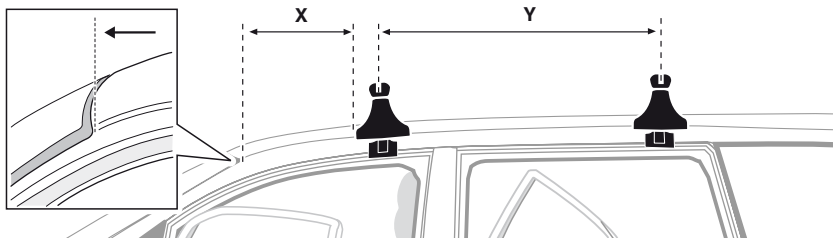

GB/US Tighten alternately

D Die Schrauben abwechselnd anziehen

F Serrer alternativement chaque côté

NL Afwisselend aan de linker- en de rechterkant aandraaien

I Alternare il serraggio delle viti

E Serrare alternativamente

PT Aperte alternadamente

S Dra åt växelvis

FIN Kierrä vuorotellen

EST Pinguldage vaheldumisi

LAT Pievelciēt pamišus

LIT Užsukinėkite pakaitomis

PL Śruby dokręcaj naprzemiennie

RU Затягивайте попеременно

CZ Pokręťte bagážníka dokręcaj dokręcaj naprzemiennie.

SK Doťahujte striedavo

SLO Privijajte izmenično.

HR Naizmjenično zategnite

HU Egymástól függetlenül szorítandó

GR Σφίγγετε εναλλάξ

TR Dönüşümlü sıkın

中文 交替拧紧

한국어 번갈아 가며 조이십시오.

日本語 交互に締め付けてください。

ไทย ชันในแบบสลับ






6





480R/754




480

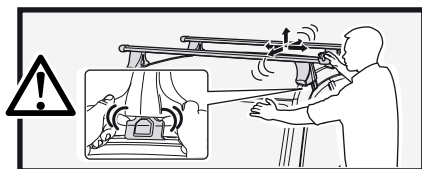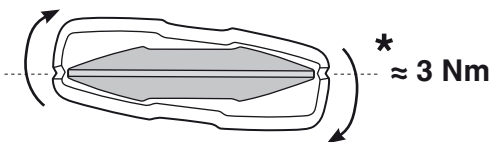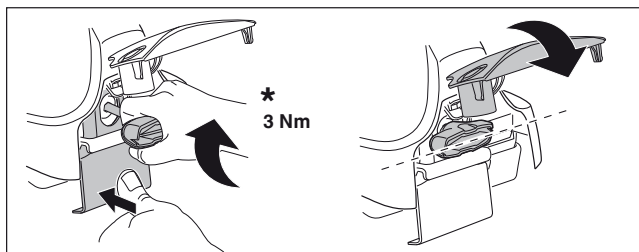




750





i








i

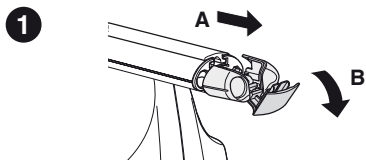

i

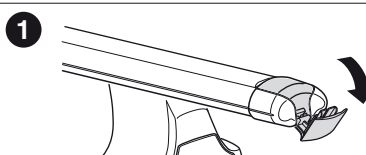

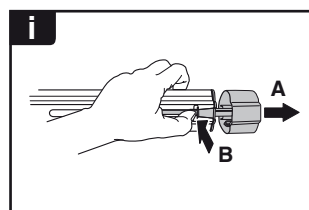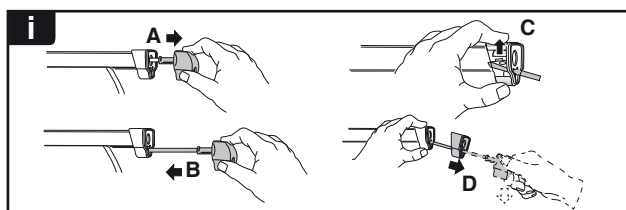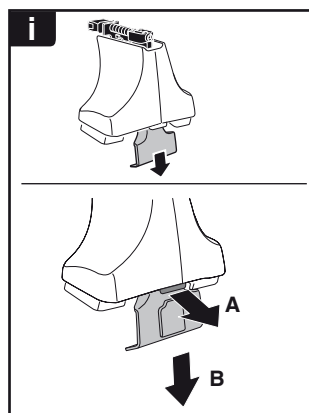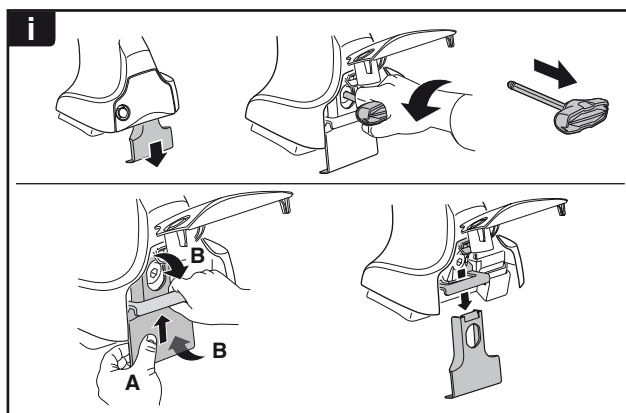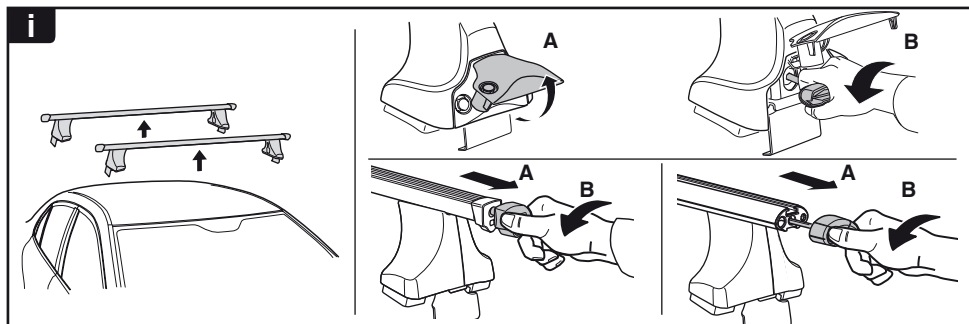

THULE®
SWEDEN

**ONE
KEY
SYSTEM**

544 (x4)

596 (x6)

588 (x8)

NA 510 (x10)

EUR 452 (x12)

ASIA