

Kit 1198



KIA Rio (Mk I), 4-dr Sedan, 00-05 / *01-05

KIA Rio (Mk I), 5-dr Hatchback, 00-05



KIA Rio Cinco, 5-dr Wagon, 02-05, 06-10

*North America



**480R
754**



480












750






THULE®
SWEDEN

ISO 11154-E

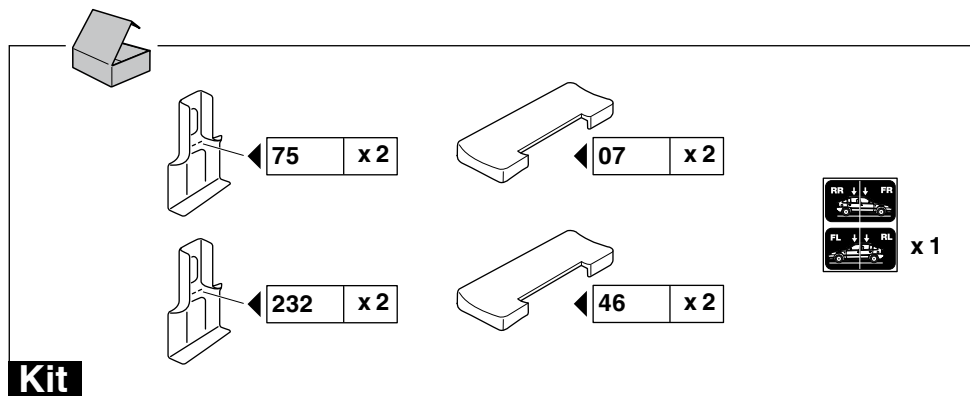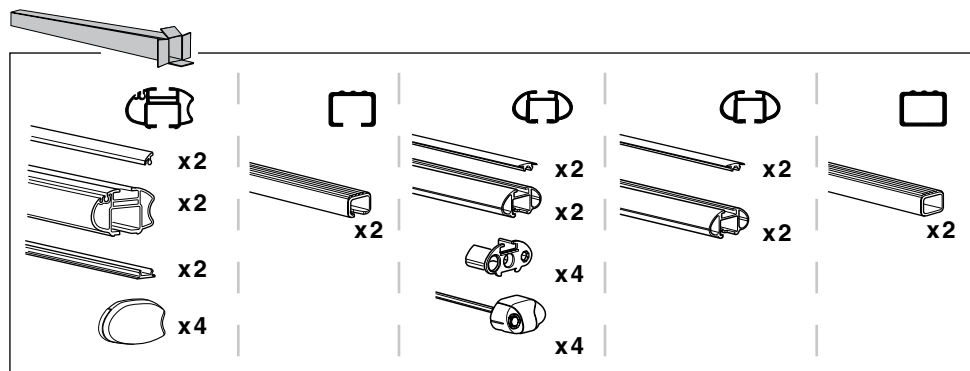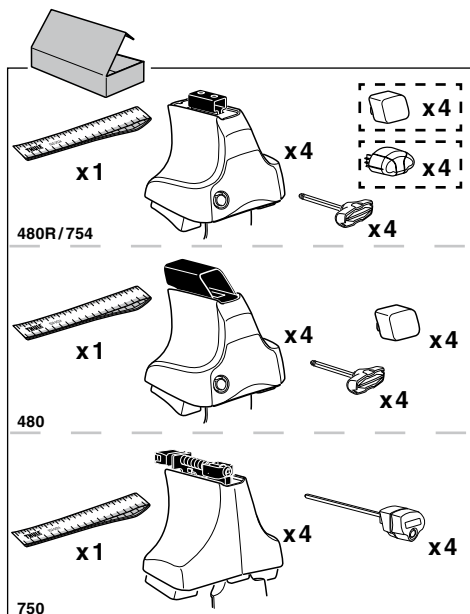
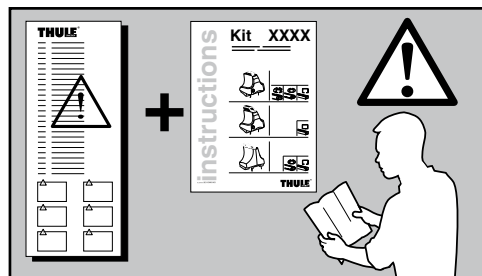


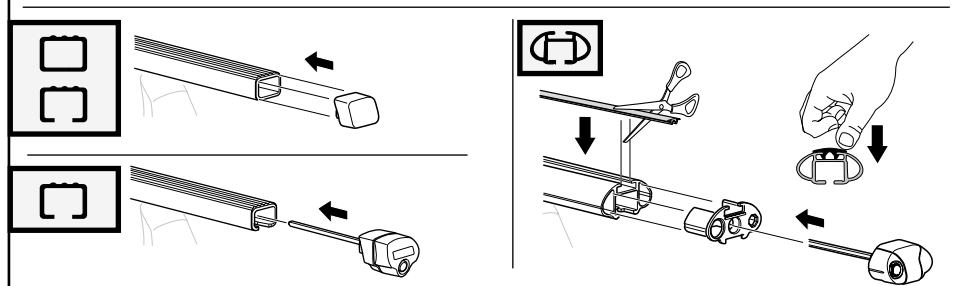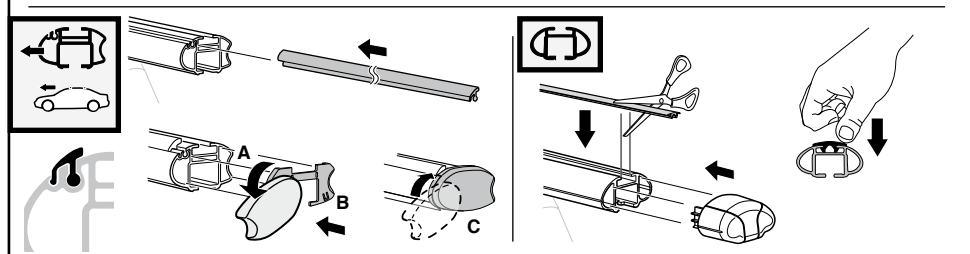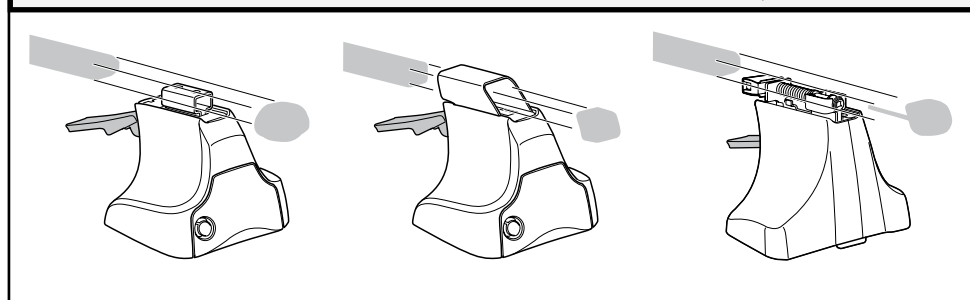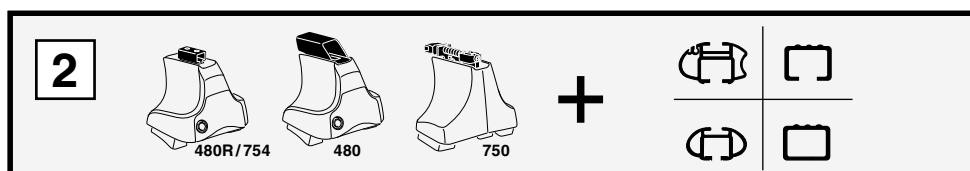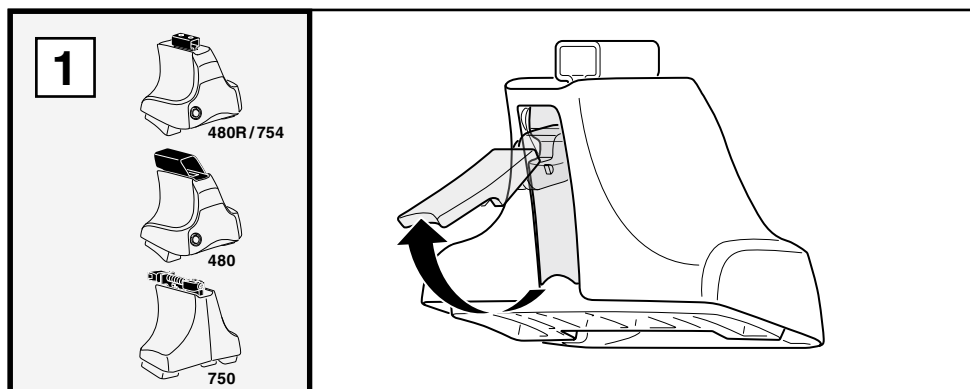


3



1



2



KIA Rio (Mk I), 4-dr Sedan, 00-05 / *01-05

X

29,5


KIA Rio (Mk I), 5-dr Hatchback, 00-05

29


KIA Rio Cinco, 5-dr Wagon, 02-05, 06-10

29

1



2



KIA Rio (Mk I), 4-dr Sedan, 00-05 / *01-05

Y

26

KIA Rio (Mk I), 5-dr Hatchback, 00-05

26

KIA Rio Cinco, 5-dr Wagon, 02-05, 06-10

26




480R




480

1



2



KIA Rio (Mk I), 4-dr Sedan, 00-05 / *01-05

X inch

X mm

37 1/4"

946 mm

KIA Rio (Mk I), 5-dr Hatchback, 00-05

37"


941 mm

KIA Rio Cinco, 5-dr Wagon, 02-05, 06-10


37"

941 mm

1



2



KIA Rio (Mk I), 4-dr Sedan, 00-05 / *01-05

Y inch

Y mm

35 7/8"

911 mm

KIA Rio (Mk I), 5-dr Hatchback, 00-05

35 7/8"

911 mm

KIA Rio Cinco, 5-dr Wagon, 02-05, 06-10

35 7/8"














911 mm

4


KIA Rio (Mk I), 4-dr Sedan, 00-05 / *01-05

KIA Rio (Mk I), 5-dr Hatchback, 00-05





KIA Rio Cinco, 5-dr Wagon, 02-05, 06-10

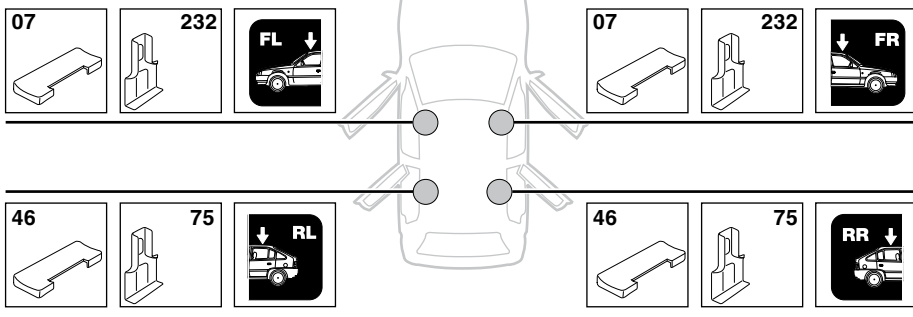

5



	X mm	Y mm	X inch	Y inch
KIA Rio (Mk I), 4-dr Sedan, 00-05 / *01-05	200 mm	615 mm	7 7/8"	24 1/4"
KIA Rio (Mk I), 5-dr Hatchback, 00-05	295 mm	700 mm	11 5/8"	27 1/2"
KIA Rio Cinco, 5-dr Wagon, 02-05, 06-10	295 mm	700 mm	11 5/8"	27 1/2"

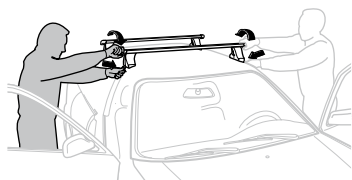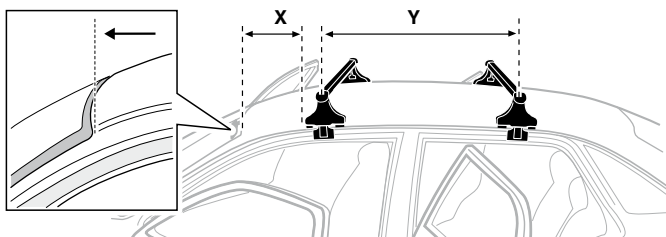

GB/US Tighten alternately

D Die Schrauben abwechselnd anziehen

F Serrer alternativement chaque côté

NL Afwisselend aan de linker- en de rechterkant aandraaien

I Alternare il serraggio delle viti

E Serrare alternativamente

PT Aperte alternadamente

S Dra åt växelsvis

FIN Kierrä vuorotellen

EST Pinguldage vaheldumisi

LAT Pievelciēt pamišus

LIT Užsukinėkite pakaitomis

PL Śruby dokręcaj naprzemiennie

RU Затягивайте попеременно

CZ Pokręťte bagażníka dokręcaj dokręcaj naprzemiennie.

SK Doťahujte striedavo

SLO Privijajte izmenično.

HR Naizmjenično zategnite

HU Egymástól függetlenül szorítandó

GR Σφίγγετε εναλλάξ

TR Dönüşümlü sıkın


中文 交替拧紧

한국어 번갈아 가며 조이십시오.

日本語 交互に締め付けてください。

ไทย ขันในแบบสลับ






6





480R/754



480

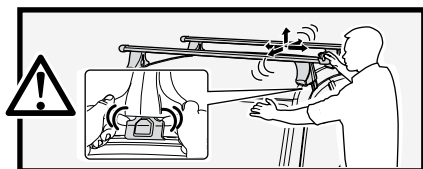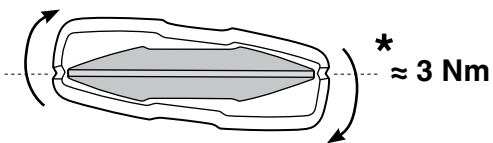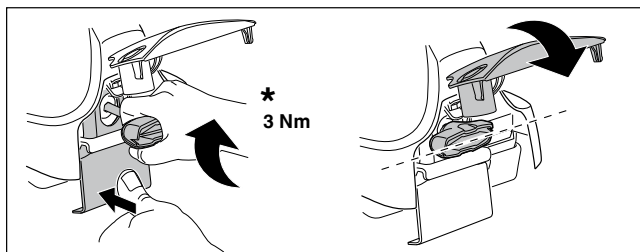


750




i




1




2




i



1




2




i








1



2



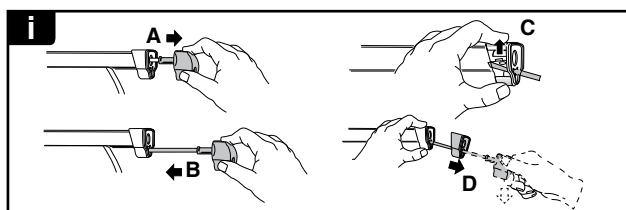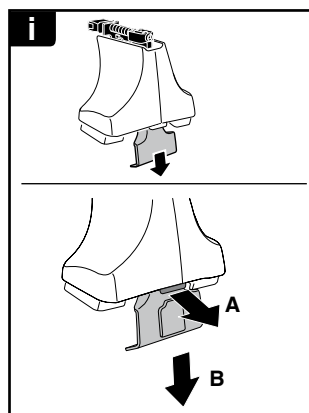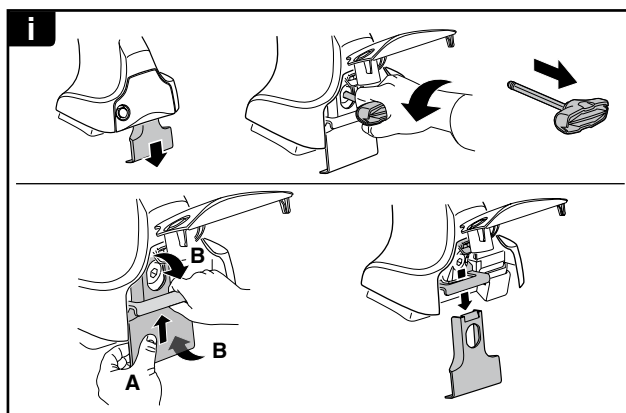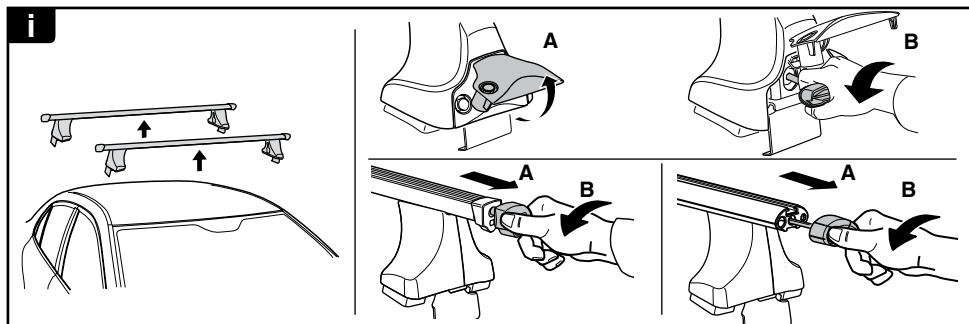

THULE®
SWEDEN

**ONE
KEY
SYSTEM**

		544 (x4)
		596 (x6)
		588 (x8)
NA		510 (x10)
EUR		452 (x12)
ASIA		