



Kit 1366

MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07



MINI Cooper (Mk.II), 3-dr Hatchback, 07- / *08-

*North America



**480R
754**



480



750






THULE[®]
SWEDEN

ISO 11154-E

The image displays three assembly diagrams for different models, each showing a ruler, a main unit, and various accessories with their quantities.






- 480R/754:** Shows a ruler (x1), a main unit (x4), a small cube (x4), a small cylinder (x4), and a screwdriver (x4).
- 480:** Shows a ruler (x1), a main unit (x4), a small cube (x4), and a screwdriver (x4).
- 750:** Shows a ruler (x1), a main unit (x4), and a screwdriver (x4).


This diagram shows the exploded view of the robot's chassis. The components and their quantities are:

- 659** (x 4): A vertical support piece.
- 182** (x 4): A horizontal support piece.
- 50993** (x 2): A rectangular plate with four mounting holes.
- RR** (x 1): A motor with a gear.
- FR** (x 1): A motor with a gear.
- FL** (x 1): A motor with a gear.
- RL** (x 1): A motor with a gear.



The diagram also includes a small box icon in the top left corner and a "Kit" label in the bottom left corner.

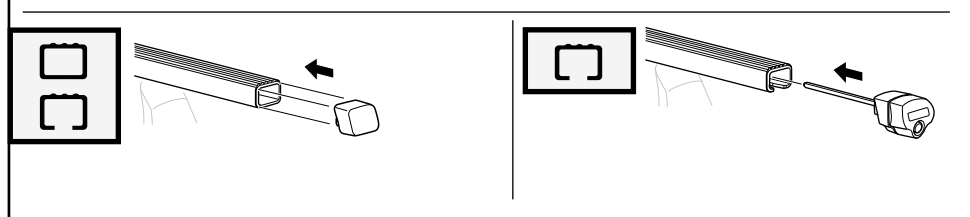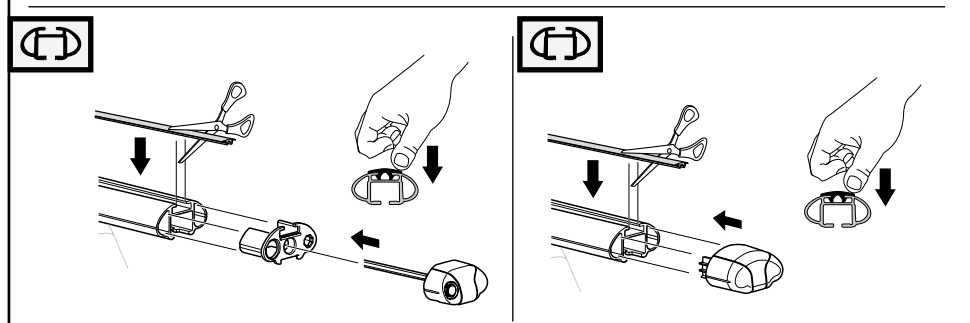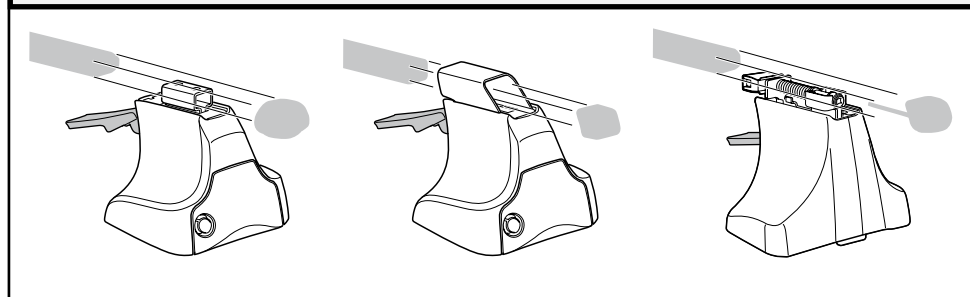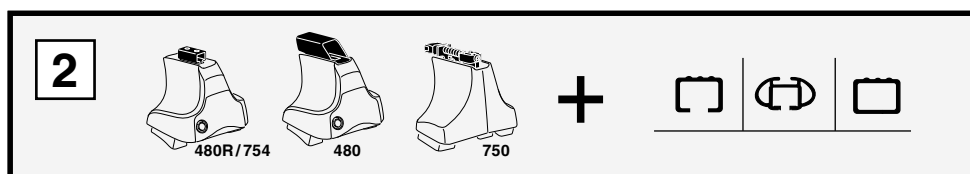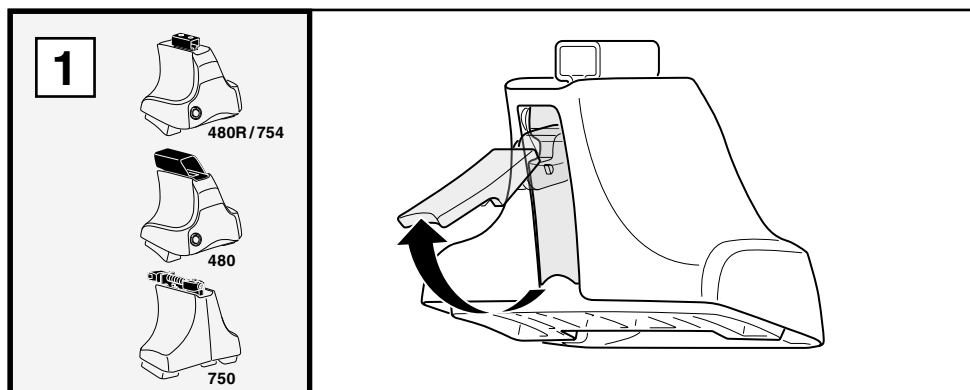

3





754




750



1




2




	X
MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07	31
MINI Cooper (Mk.II), 3-dr Hatchback, 07- / *08-	28


1



2



	Y
MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07	32
MINI Cooper (Mk.II), 3-dr Hatchback, 07- / *08-	32




480R




480

1




2



	X inch	X mm
MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07	37 ⁷ / ₈ "	961 mm
MINI Cooper (Mk.II), 3-dr Hatchback, 07- / *08-	36 ⁵ / ₈ "	931 mm

1









2




	Y inch	Y mm
MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07	38 ¹ / ₄ "	971 mm
MINI Cooper (Mk.II), 3-dr Hatchback, 07- / *08-	38 ¹ / ₄ "	971 mm

4



MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07
MINI Cooper (Mk.II), 3-dr Hatchback, 07- / *08-

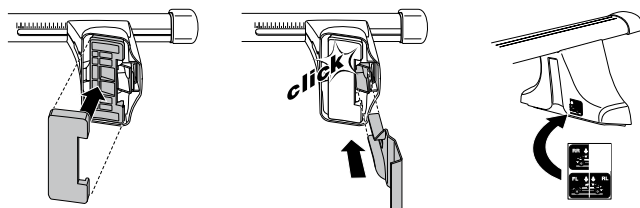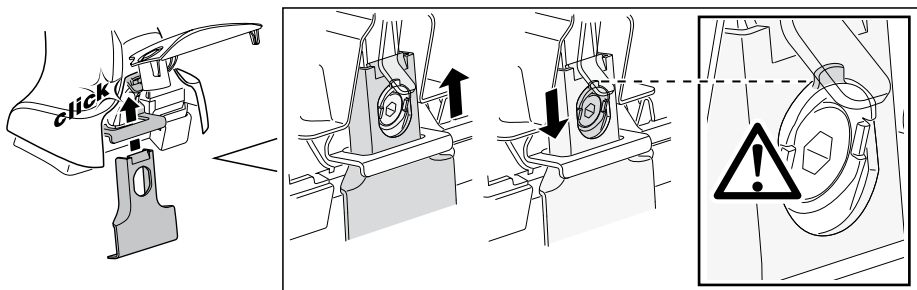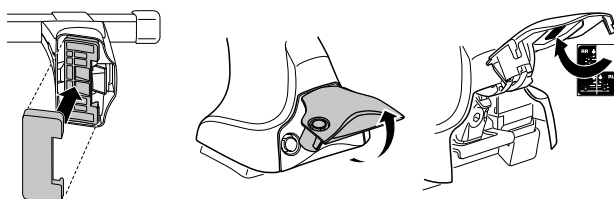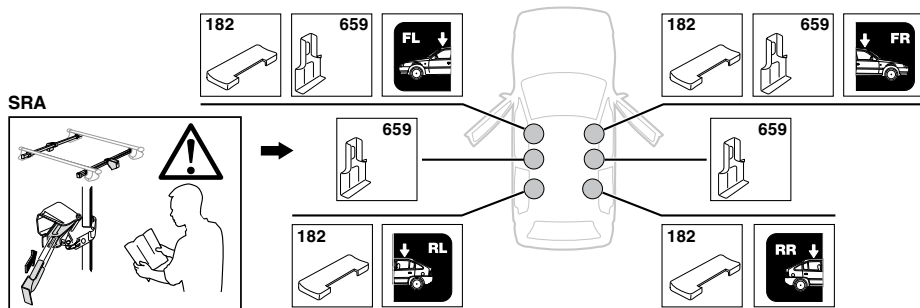

5

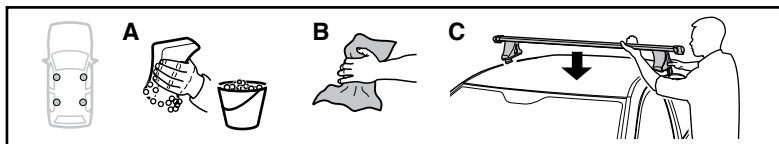


	X mm	Y mm	X inch	Y inch
MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07	110 mm	700 mm	4 ³ / ₈ "	27 ¹ / ₂ "
MINI Cooper (Mk.II), 3-dr Hatchback, 07- / *08-	110 mm	700 mm	4 ³ / ₈ "	27 ¹ / ₂ "

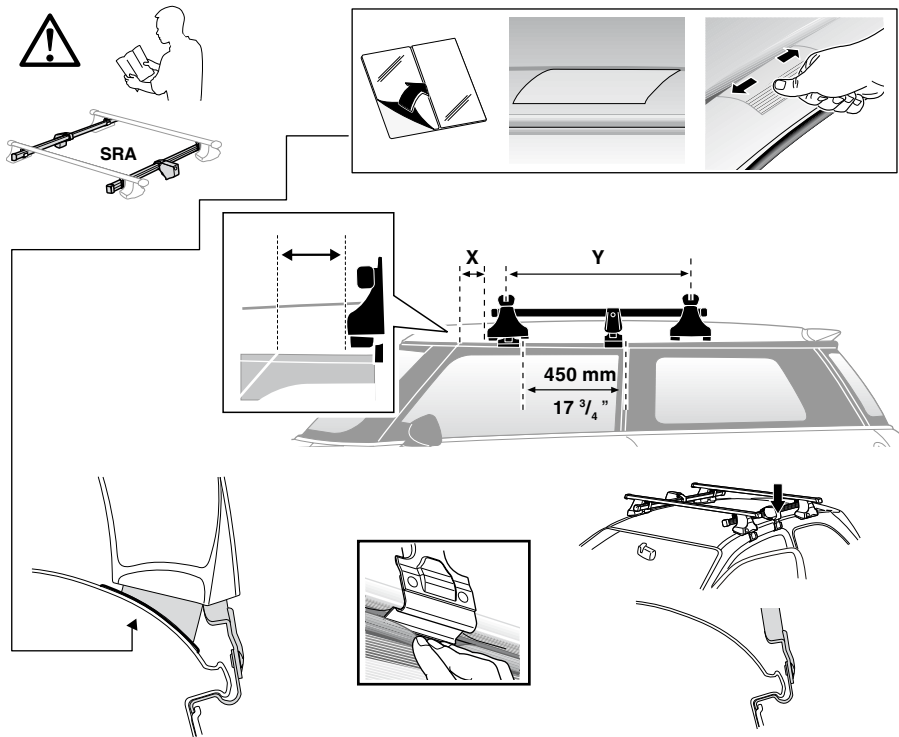

GB/US Tighten alternately
D Die Schrauben abwechselnd anziehen
F Serrer alternativement chaque côté
NL Afwisselend aan de linker- en de rechterkant aandraaien
I Alternare il serraggio delle viti
E Apretar alternativamente
PT Aperte alternadamente
S Dra åt växelvis
FIN Kierrä vuorotellen
EST Pinguldage vaheldumisi
LAT Pievelciēt pamišus
LIT Užsukinėkite pakaitomis
PL Śruby dokręcaj naprzemiennie
RU Затягивайте попеременно

CZ Pokrétla bagazníka dokręcaj dokręcaj naprzemiennie.
SK Dofahujte striedavo
SLO Privijajte izmenično.
HR Naizmjenično zategnite
HU Egyarástól függetlenül szorítandó
GR Σφιγγετε εναλλάξ
TR Dönüşümlü sıkın
中文 交替拧紧
한국어 번갈아 가며 조이십시오.
日本語 交互に締め付けてください。
ไทย ชั้นในแบบสลับ









6











480R/754








480

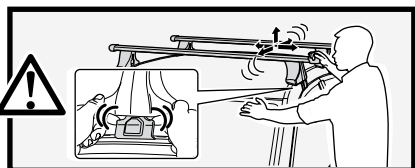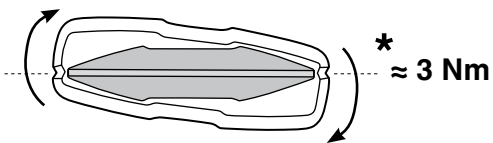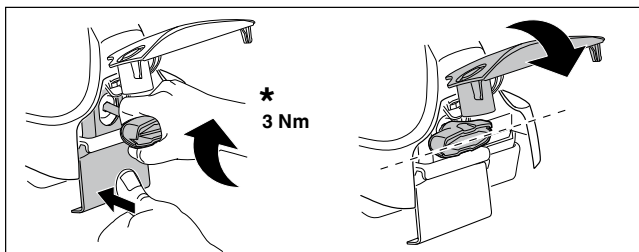

7

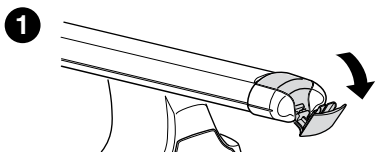

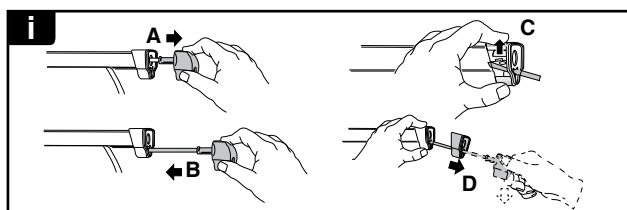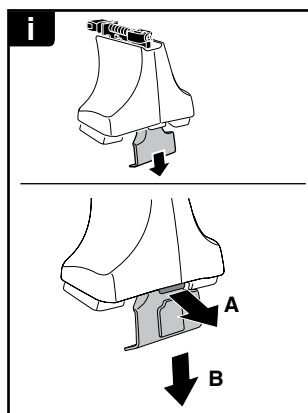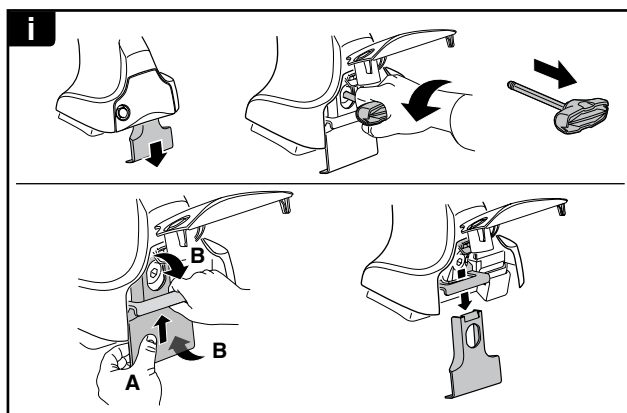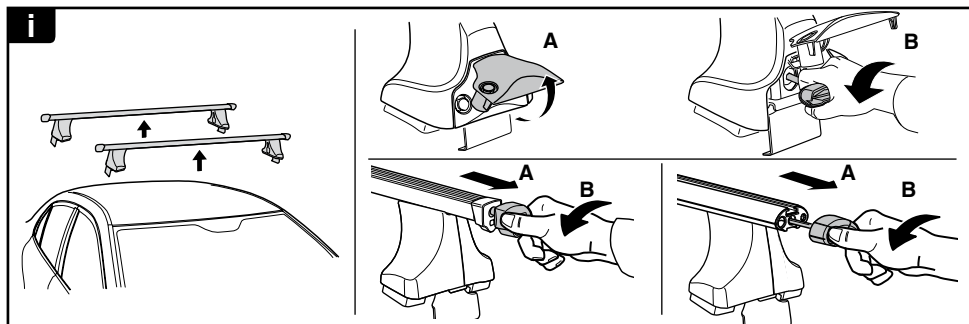

THULE
SWEDEN

**ONE
KEY
SYSTEM**

		(x4)
		(x6)
		(x8)
NA		(x10)
EUR		(x12)
ASIA		(x12)