


Kit 1589



VOLKSWAGEN Polo (Mk.IV), 3-dr Hatchback, 02-04, 05-09

VOLKSWAGEN Polo (Mk.IV), 4-dr Sedan, 02-04, 05-09


VOLKSWAGEN Polo (Mk.IV), 5-dr Hatchback, 02-04, 05-09



754 Rapid System
480R Rapid Traverse (North America)



480 Traverse (North America)



THULE[®]
SWEDEN

ISO 11154-E

VOLKSWAGEN Polo (Mk.IV), 3-dr Hatchback,
02-04, 05-09

$$\begin{array}{c} \text{xx kg} \\ \text{xx lbs} \end{array} + \begin{array}{c} \text{7 kg} \\ \text{15,4 lbs} \end{array} =$$

Max.
60kg/132 lbs




VOLKSWAGEN Polo (Mk.IV), 4-dr Sedan,

02-04, 05-09


VOLKSWAGEN Polo (Mk.IV), 5-dr Hatchback,

02-04, 05-09

Max.
75kg/165 lbs

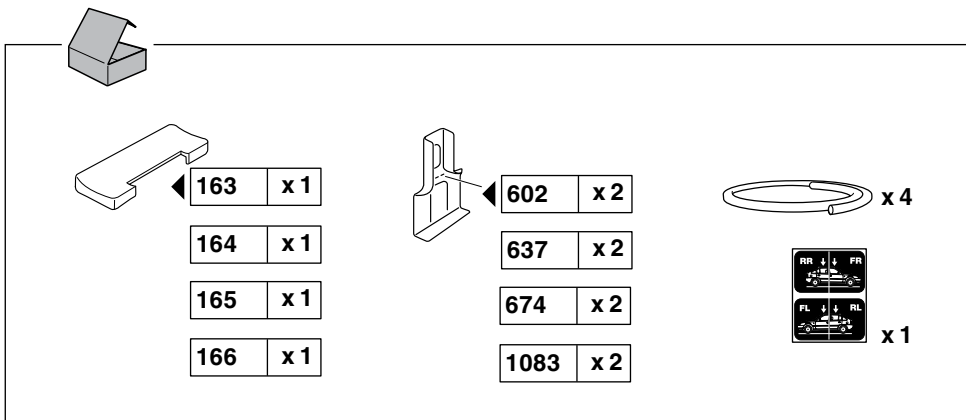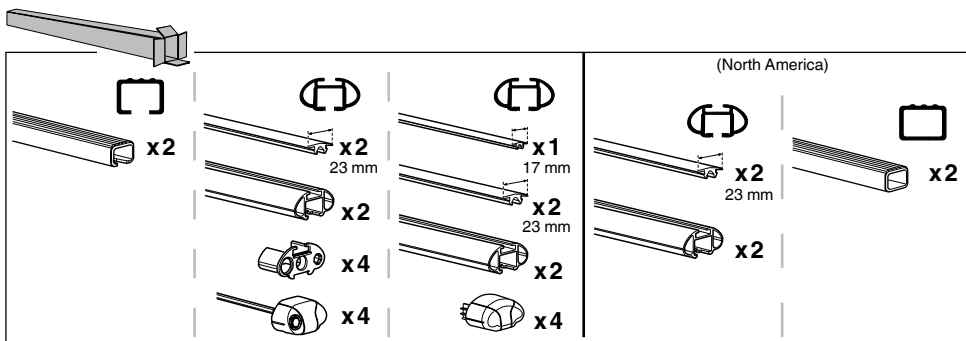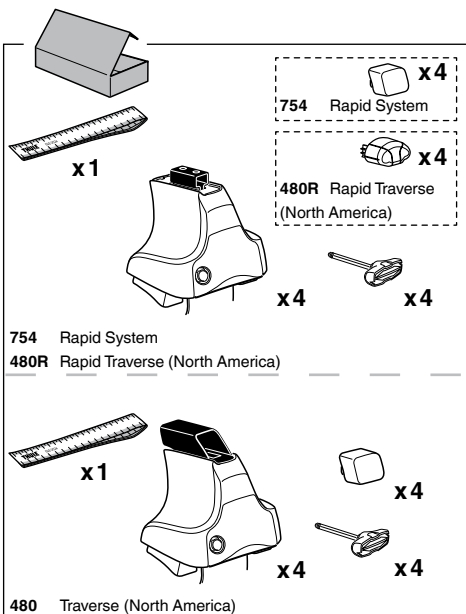



1

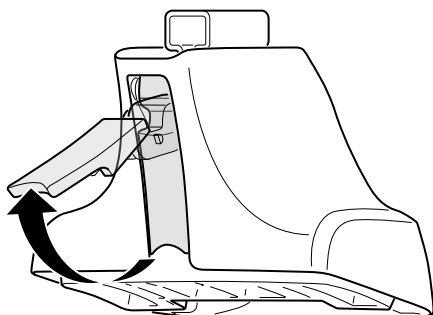



2





754 Rapid System
480R Rapid Traverse
(North America)



x4

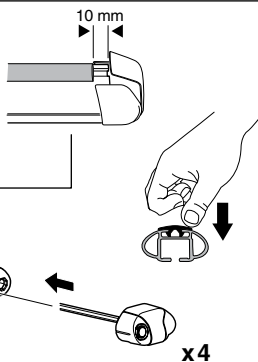



x4

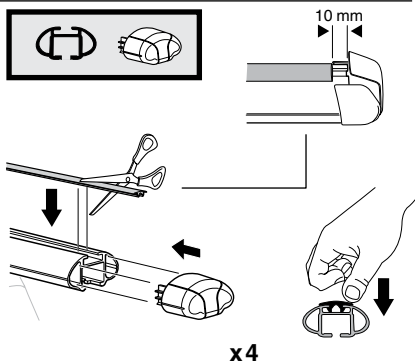

x4




480 Traverse
(North America)





x4

3




754 Rapid System



X

X

VOLKSWAGEN Polo (Mk.IV), 3-dr Hatchback, 02-04, 05-09	30,5
VOLKSWAGEN Polo (Mk.IV), 4-dr Sedan, 02-04, 05-09	30
VOLKSWAGEN Polo (Mk.IV), 5-dr Hatchback, 02-04, 05-09	30,5



Y

Y

VOLKSWAGEN Polo (Mk.IV), 3-dr Hatchback, 02-04, 05-09	27
VOLKSWAGEN Polo (Mk.IV), 4-dr Sedan, 02-04, 05-09	28
VOLKSWAGEN Polo (Mk.IV), 5-dr Hatchback, 02-04, 05-09	27

3




480R Rapid Traverse



480 Traverse



(North America)




X inch/mm

X inch

X mm

VOLKSWAGEN Polo (Mk.IV), 3-dr Hatchback, 02-04, 05-09	37 ⁵ / ₈ "	956 mm
VOLKSWAGEN Polo (Mk.IV), 4-dr Sedan, 02-04, 05-09	37 ¹ / ₂ "	951 mm
VOLKSWAGEN Polo (Mk.IV), 5-dr Hatchback, 02-04, 05-09	37 ⁵ / ₈ "	956 mm




Y inch/mm

Y inch

Y mm


VOLKSWAGEN Polo (Mk.IV), 3-dr Hatchback, 02-04, 05-09	36 ¹ / ₄ "	921 mm
VOLKSWAGEN Polo (Mk.IV), 4-dr Sedan, 02-04, 05-09	36 ⁵ / ₈ "	931 mm
VOLKSWAGEN Polo (Mk.IV), 5-dr Hatchback, 02-04, 05-09	36 ¹ / ₄ "	921 mm

4





5

VOLKSWAGEN Polo (Mk.IV), 3-dr Hatchback, 02-04, 05-09






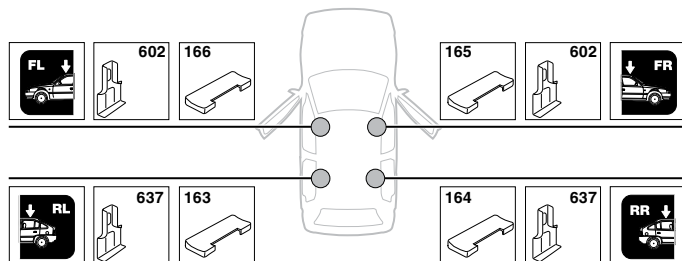


VOLKSWAGEN Polo (Mk.IV), 4-dr Sedan, 02-04, 05-09

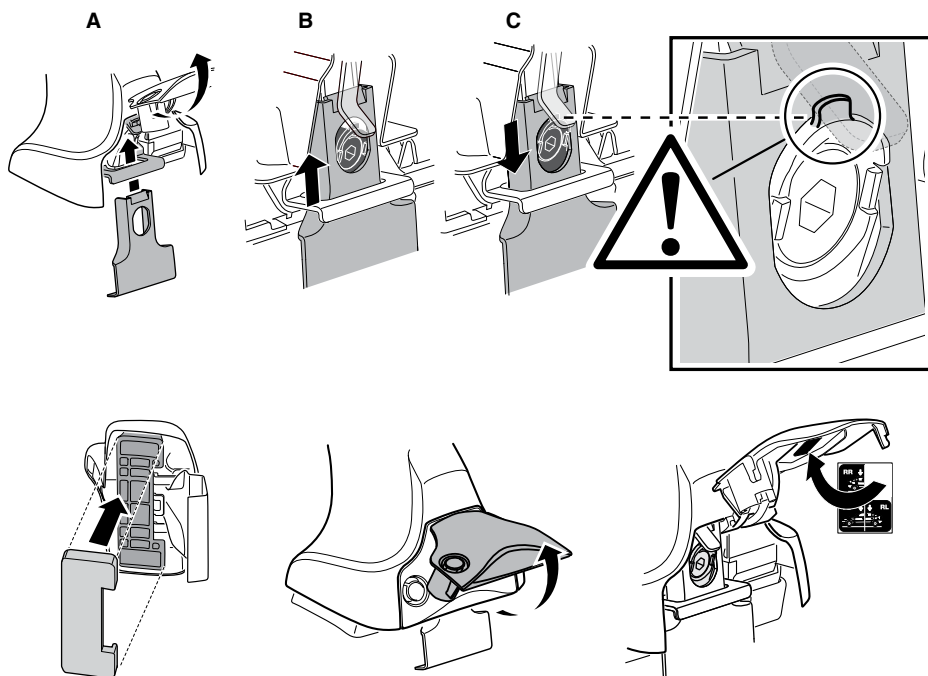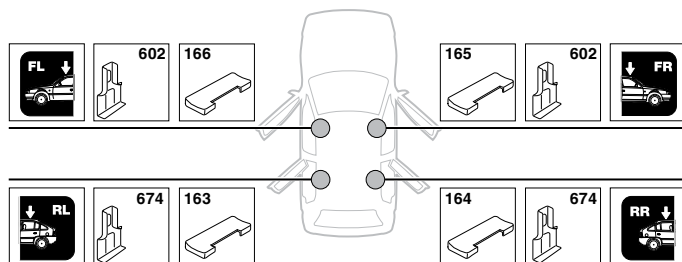


5


VOLKSWAGEN Polo (Mk.IV), 5-dr Hatchback, 02-04, 05-09

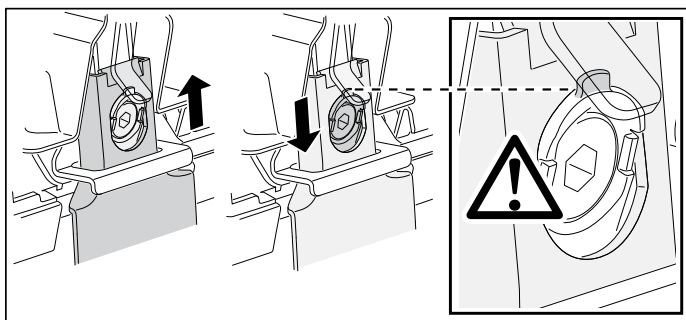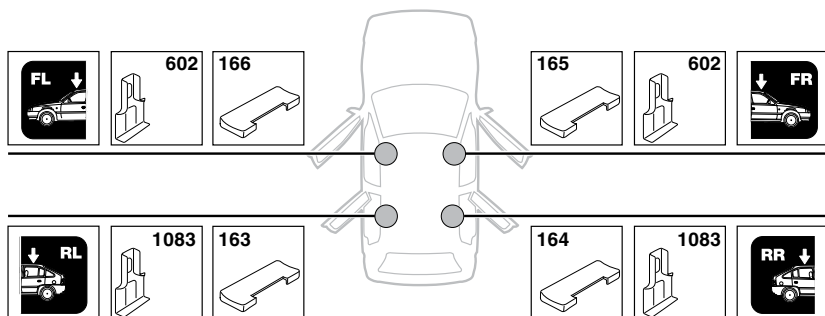


6

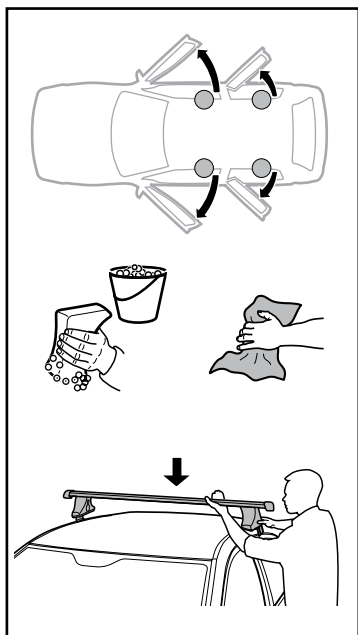



i

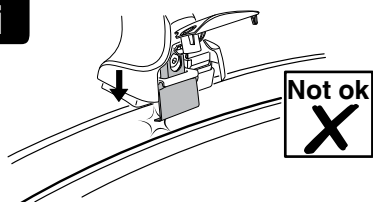

A



B

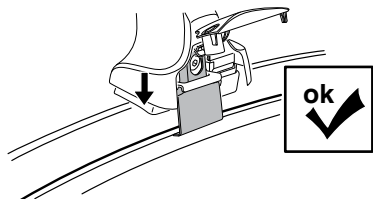

VOLKSWAGEN Polo (Mk.IV), 3-dr Hatchback, 02-04, 05-09

X mm

Y mm

X inch



Y inch

250 mm

755 mm



9 7/8"

29 3/4"




X


Y

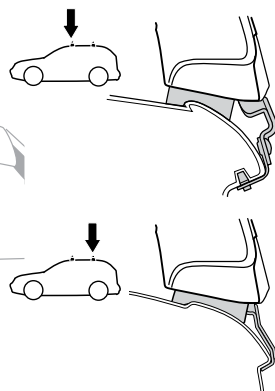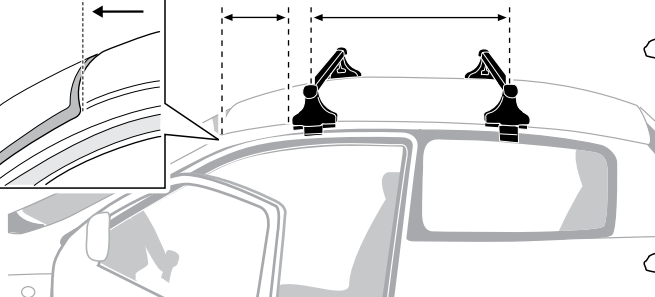


6

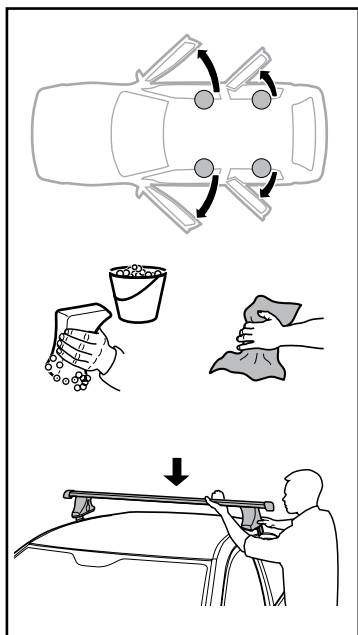



i

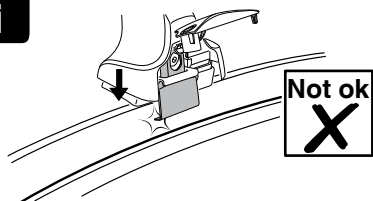

A



B

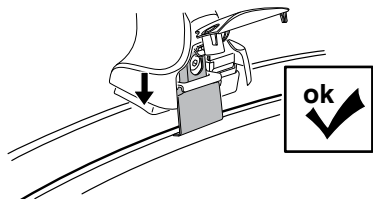

VOLKSWAGEN Polo (Mk.IV), 4-dr Sedan, 02-04, 05-09

X mm

Y mm

X inch


Y inch

245 mm

790 mm




9 5/8"

31 1/8"




X


Y




6

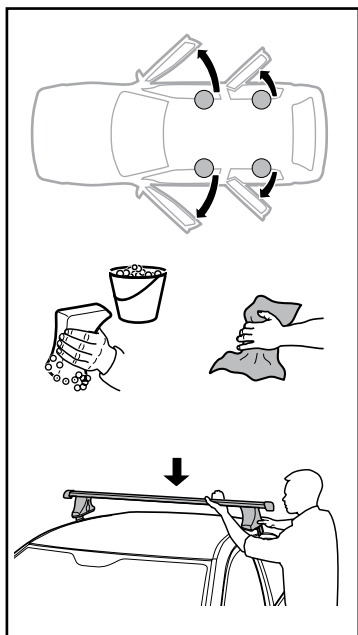



i

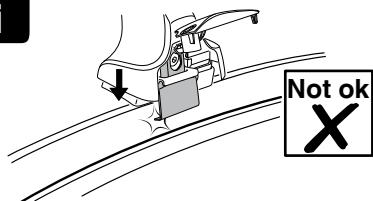

A



B

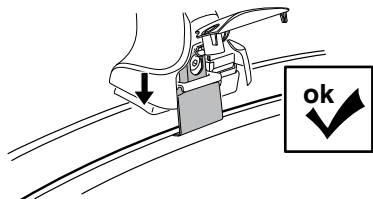

VOLKSWAGEN Polo (Mk.IV), 5-dr Hatchback, 02-04, 05-09

X mm

Y mm

X inch




Y inch

245 mm

780 mm

9 5/8"


30 3/4"

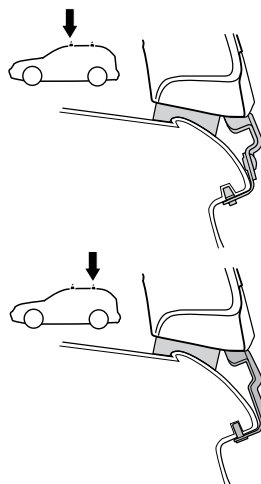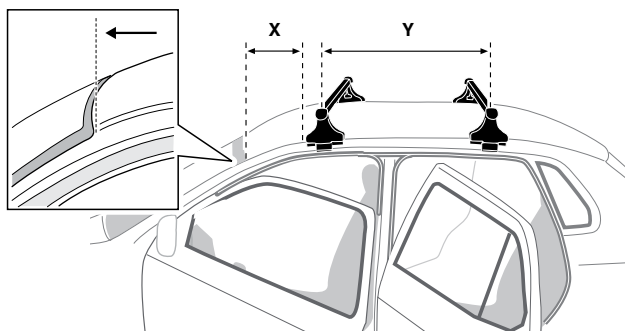

7







VOLKSWAGEN Polo (Mk.IV),
3-dr Hatchback, 02-04, 05-09




VOLKSWAGEN Polo (Mk.IV),
4-dr Sedan, 02-04, 05-09

VOLKSWAGEN Polo (Mk.IV),
5-dr Hatchback, 02-04, 05-09

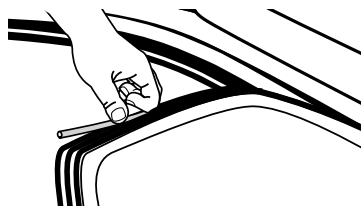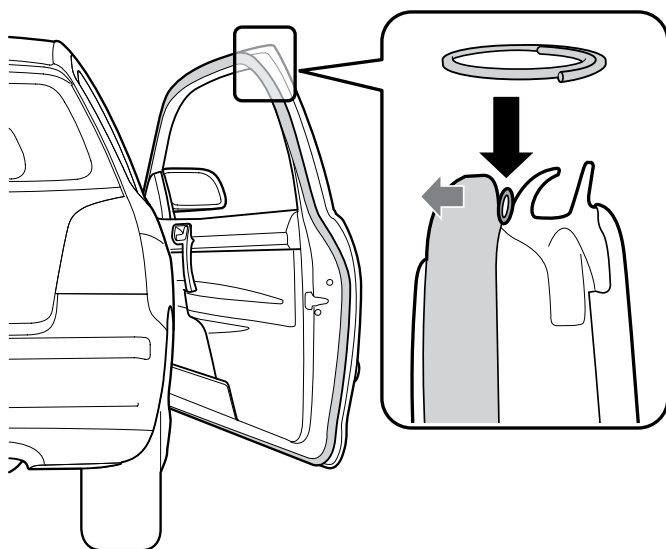

8



GB/US	Tighten alternately
D	Die Schrauben abwechselnd anziehen
F	Serrer alternativement chaque côté
NL	Afwisselend aan de linker- en de rechterkant aandraaien
I	Alternare il serraggio delle viti
E	Apretar alternativamente
PT	Aperte alternadamente
S	Dra åt växelvis
FIN	Kierrä vuorotellen
EST	Pinguldage vaheldumisi
LAT	Pielvelciet pamišus
LIT	Užsukinėkite pakaitomis
PL	Śruby dokręcaj naprzemiennie
RU	Затягивайте попеременно





CZ	Pokręťta багаžníka dokręcaj dokręcaj naprzemiennie.
SK	Dofahujte striedavo
SLO	Privijajte izmenično.
HR	Naizmjenočno zategnite
HU	Egyarástól fűggetlenül szorítandó
GR	Σφιγγετε εναλλάξ
TR	Dönüşümlü sıkın

中文 交替拧紧



한국어 번갈아 가며 조이십시오.

日本語 交互に締め付けてください。

ไทย ชันในแบบสลับ

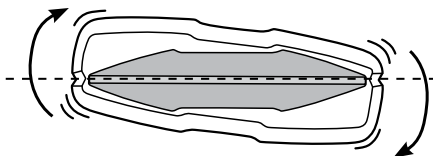

≈ 3 Nm

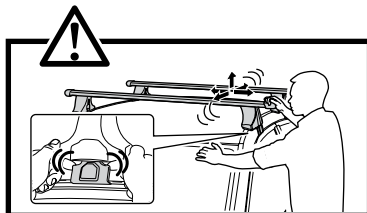

9

x1
17 mm