
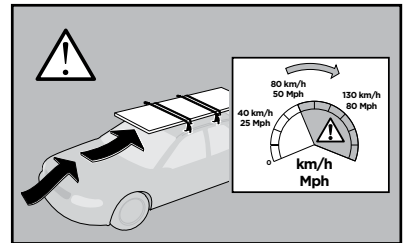
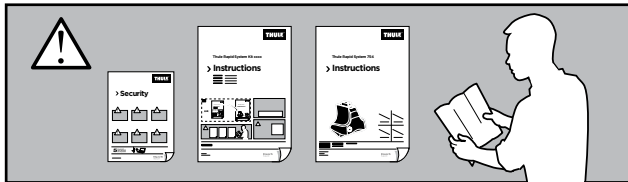
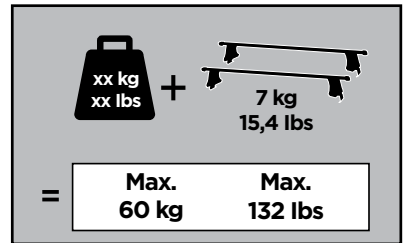


Thule Rapid System Kit 1689

> Instructions

LEXUS GS250, 4-dr Sedan, 12-




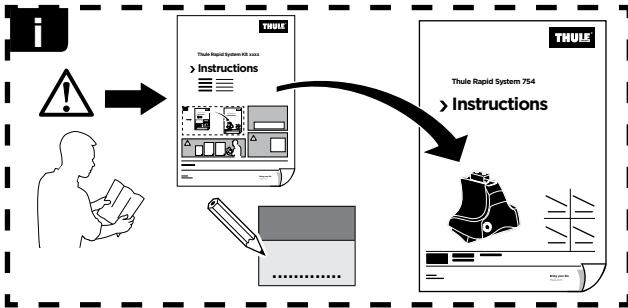


ISO 11154-E


141689

C.20120605
519-1689-01

Bring your life
thule.com

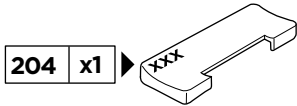



x1



x1

1



	X (scale)	X (mm)	X (inch)
LEXUS GS250 , 4-dr Sedan, 12-	34,5	996	39 1/4

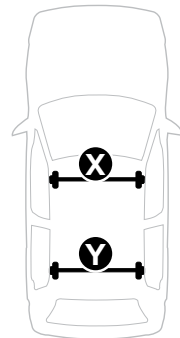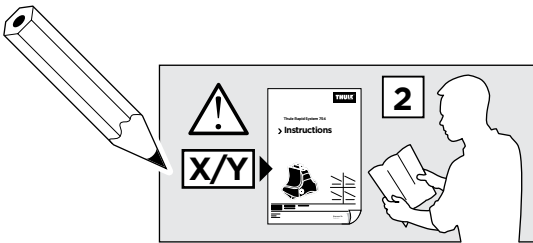


	Y (scale)	Y (mm)	Y (inch)
LEXUS GS250 , 4-dr Sedan, 12-	34	991	39

2

LEXUS GS250, 4-dr Sedan, 12-

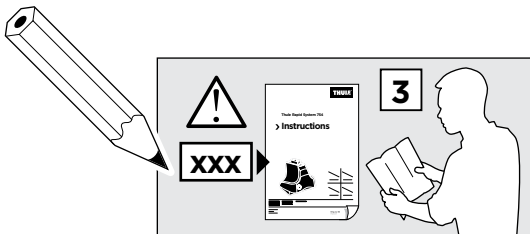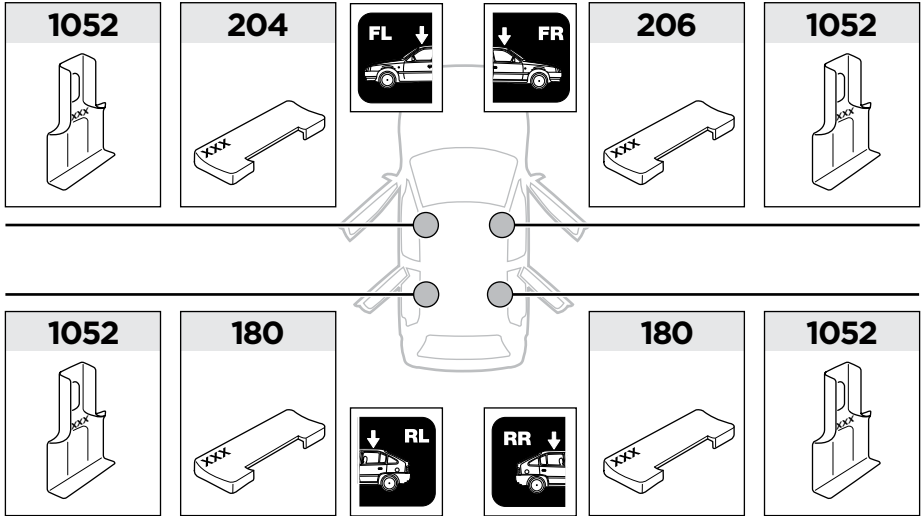

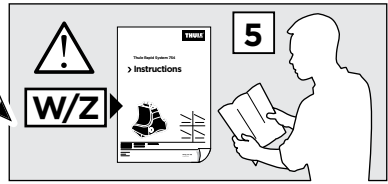3

	W (mm)	Z (mm)	W (inch)	Z (inch)
LEXUS GS250 , 4-dr Sedan, 12-	210	730	8 1/4"	28 3/4"

